
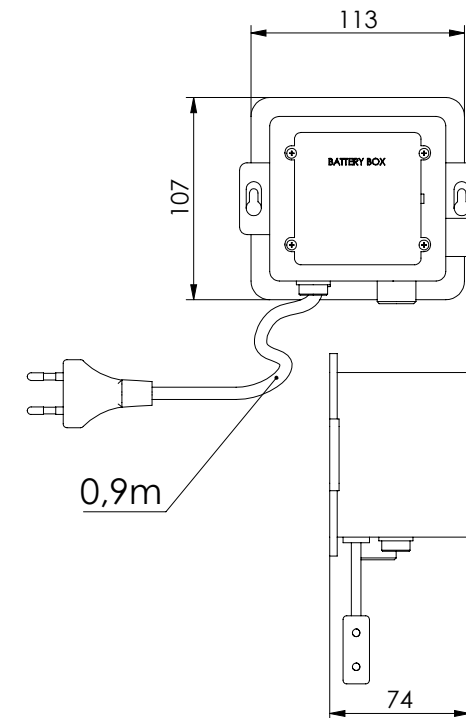
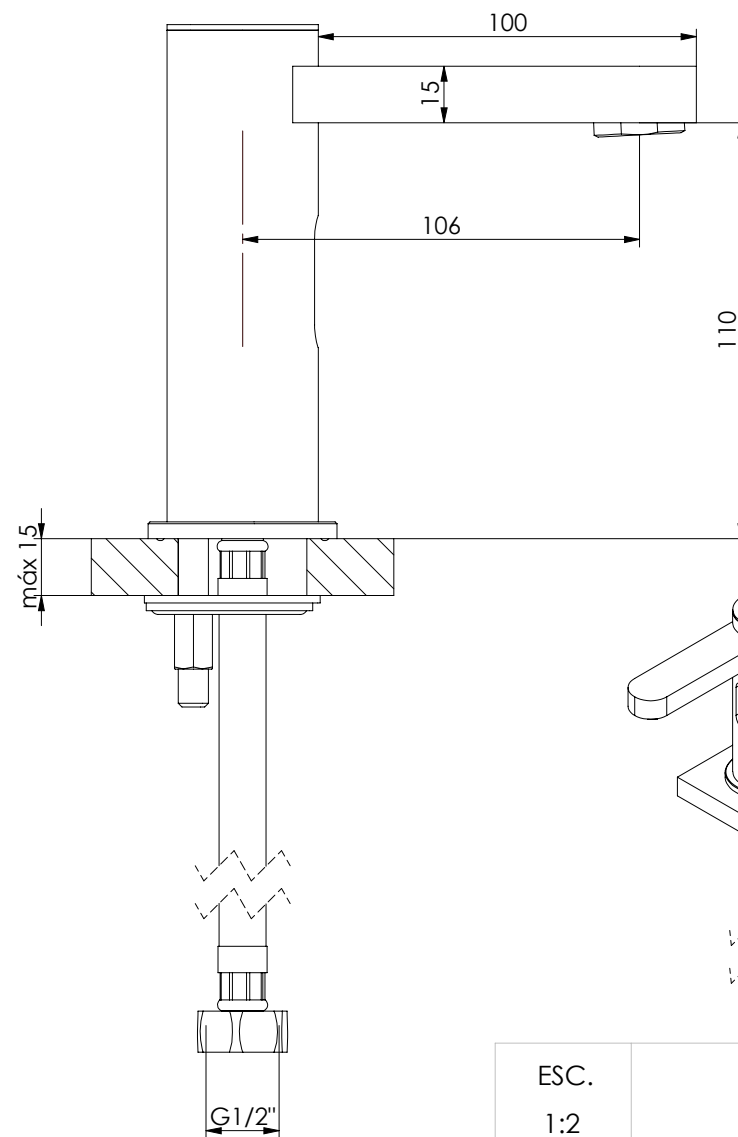
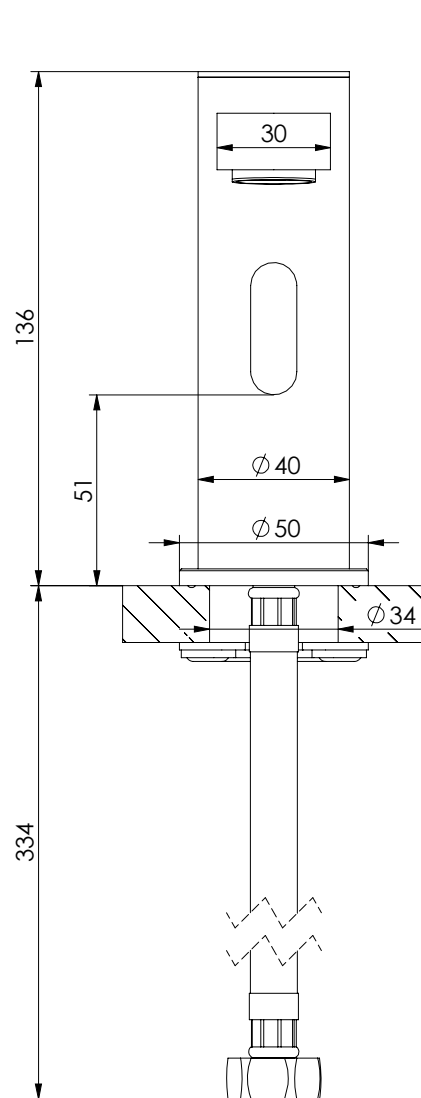




ESC. 1:2	Torneira Lavatório Célula Pilha 6V Ou 220V Cilíndrica					
Desenhou 30/06/2020						
Rev: 2 12/04/2022						


SN001

Service:




Washbasin Mixer Installation Manual

2°

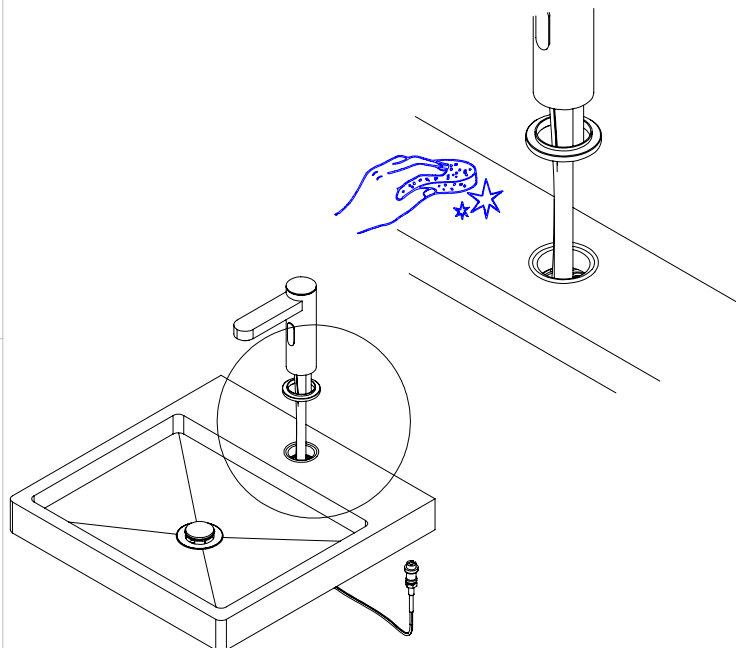


3°

Fixed:

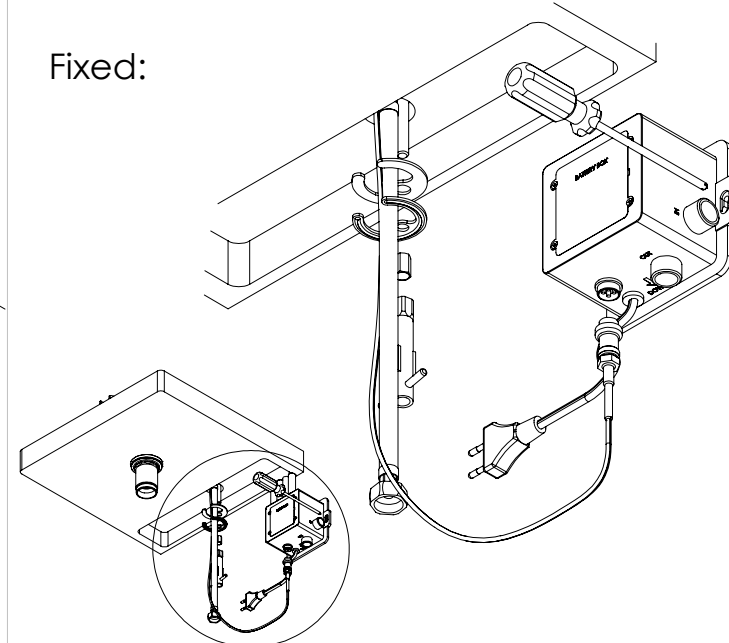


4°

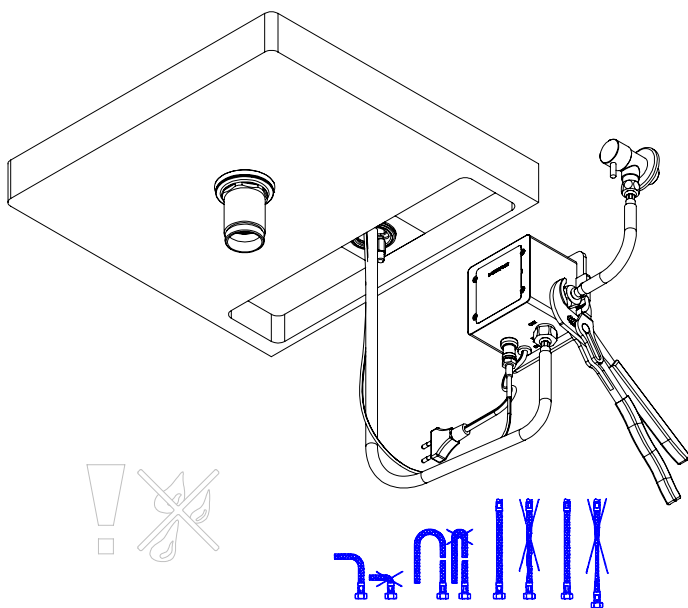

5°

Maintenance:

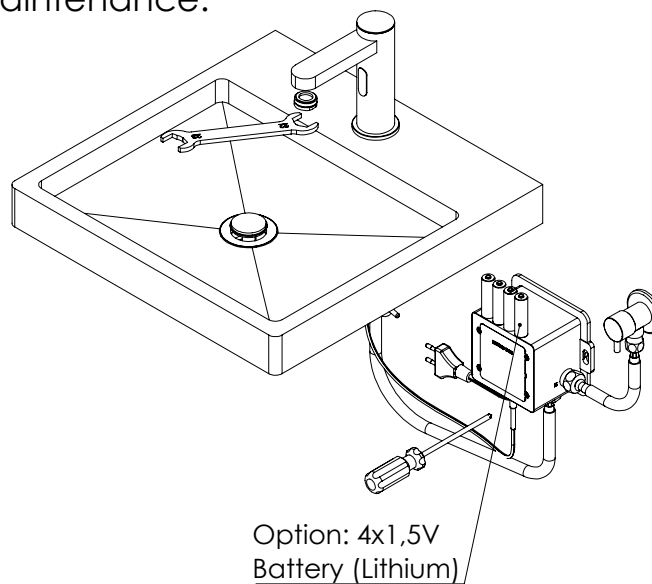

Option: 4x1,5V
Battery (Lithium)

Technical specifications

Voltage supply	DC6V
Working pressure	1 - 7 bar
Pressure resistance closed (1 min)	35 bar
Life test	500.000 cycles
Max. Hot water	75°C
Flow rate (RhA)	10.8 l/min
Sensor activation time	<1 s
Protection against intrusion (control box)	IP 65
Protection against intrusion (sensor)	IP 67
Sensor detection distance	≤ 35 cm
Power consumption (standby)	< 0,2mW
Power consumption (flushing)	< 3W
Water Saving Function	Auto off adjustable up to 1 min
Thread	G 1/2 - 14
Battery type (included)	4 X AA 1.5V
Sensor detection angle	15 deg (conical)