

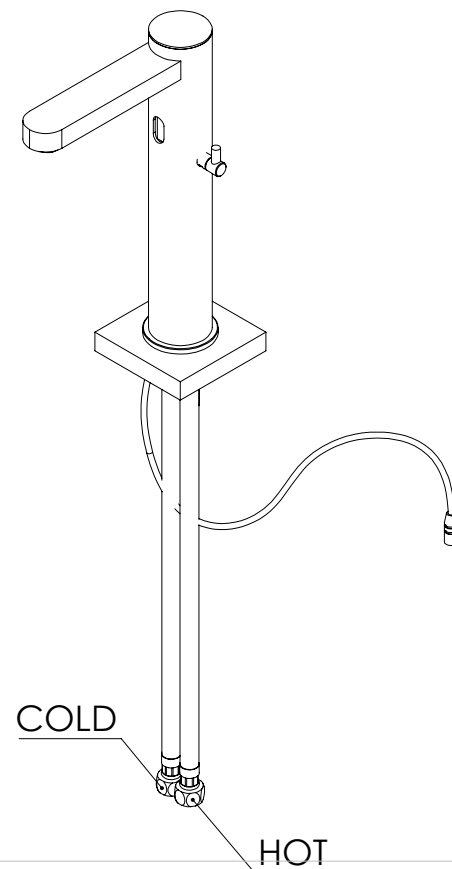


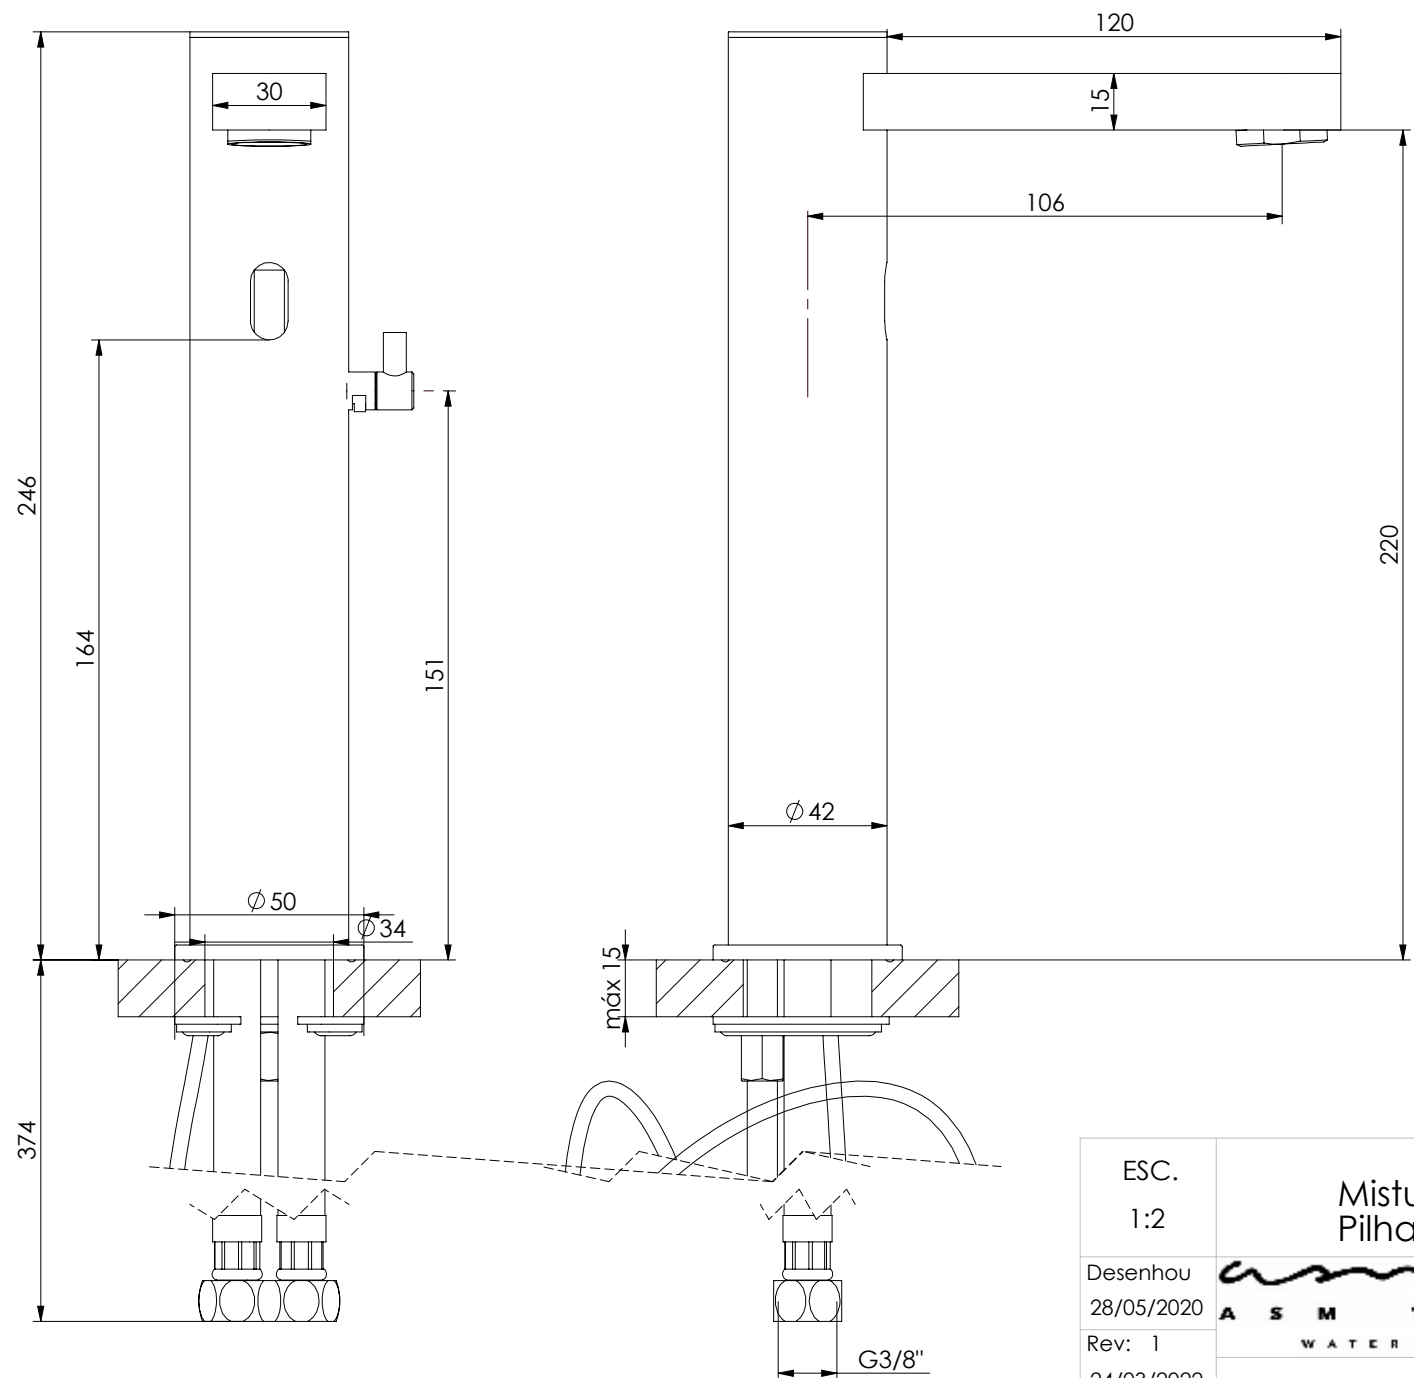


ESC. 1:2	Misturadora Lavatório Alto Célula Pilha 6V Cilíndrica				
Desenhado 28/05/2020					
Rev: 1 24/03/2022	SN003A				

Service:

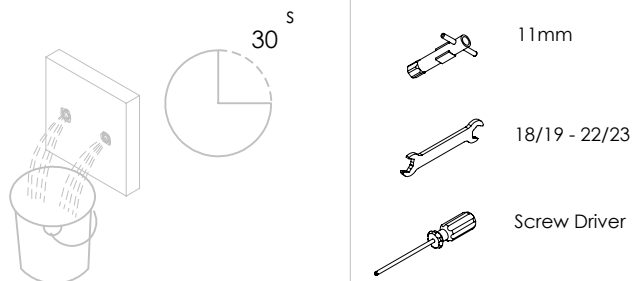


4°

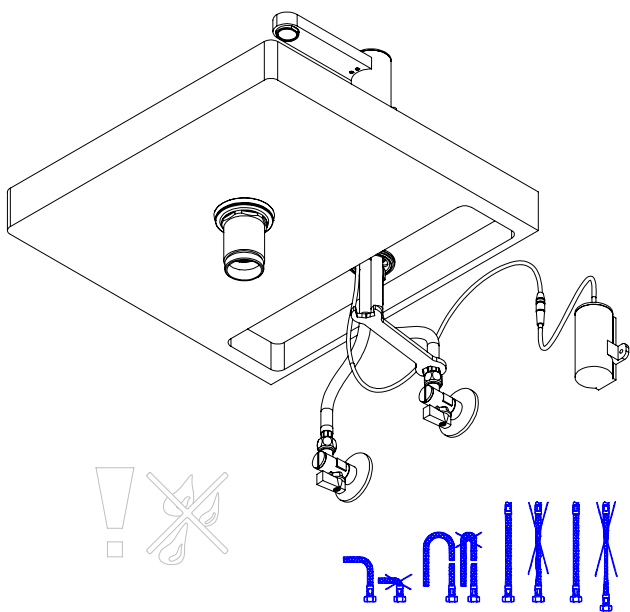


Washbasin Mixer Installation Manual

2°

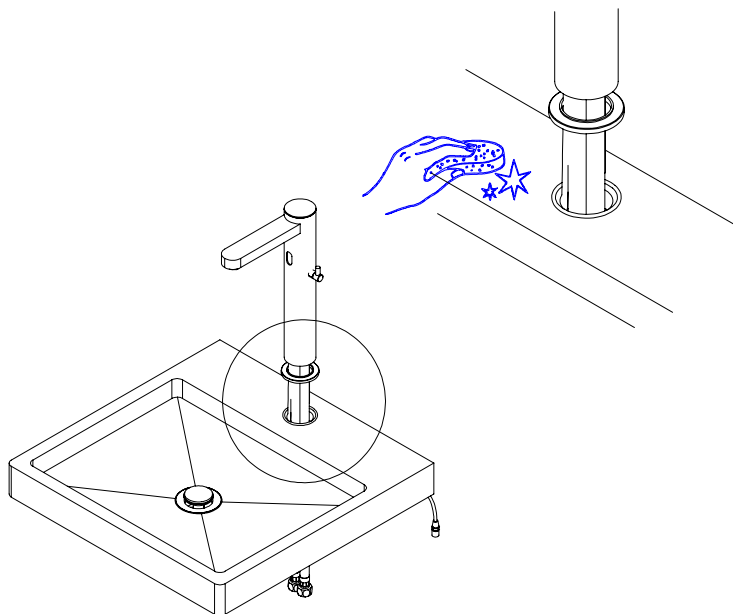


3°

Fixed:

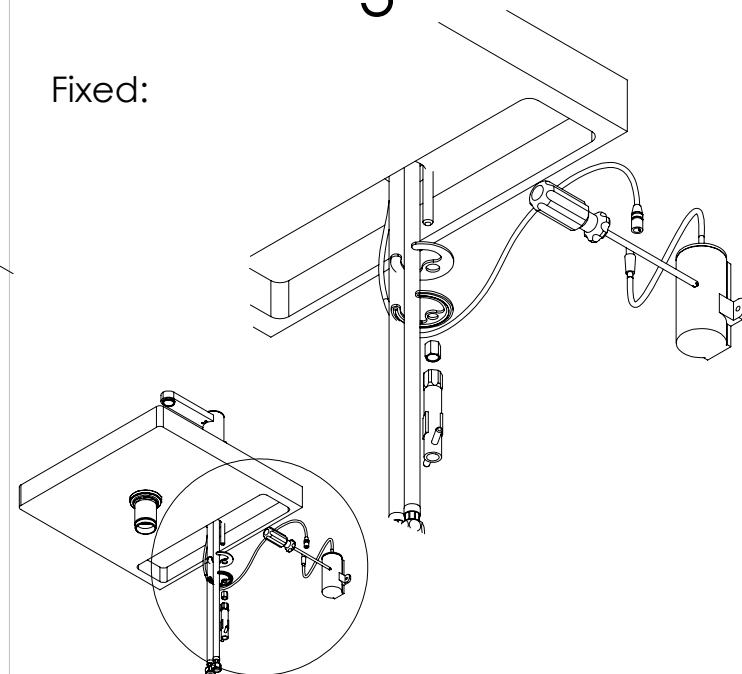

5°

Maintenance:

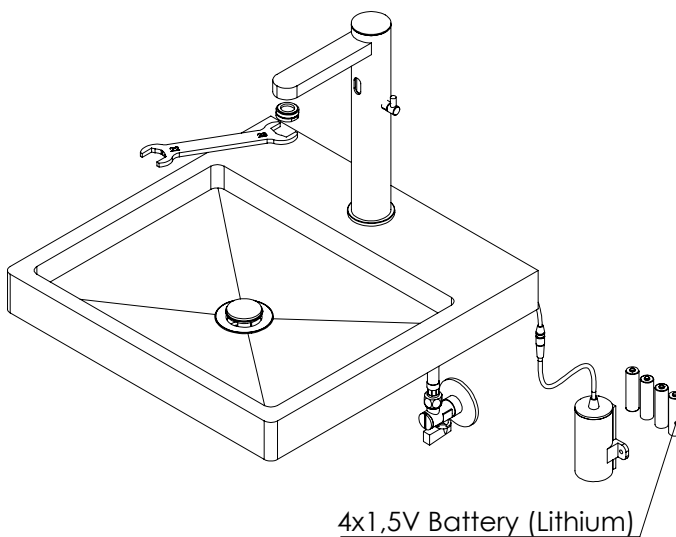


4x1,5V Battery (Lithium)

TYPE	Valve for hot and cold water	WORKING TEMPERATURE	5° C → 65° C
MIXING DEVICE	Embedded	STORAGE TEMPERATURE	5° C → 65° C
CONTROL	Latching	BASE	Brass
WORKING PRESSURE LIMIT	0,5 → 8 bar	THREADED HOLES FOR INLET HOSES	M10x1
SUGGESTED WORKING PRESSURE	1 → 5 bar		
BATTERY TYPE	4 batteries lithium primary type AA 1.5V (included)		

Assembly sequence:

- 1 st- Install the tap without connecting any elements
 - 2 nd - Insert the 4 AA 1.5V lithium batteries
 - 3 rd - Open the water
 - 4 th - Connect the battery cable to the tap
- Note : When connecting, nothing can be in front of the sensor for about ± 1 minute.

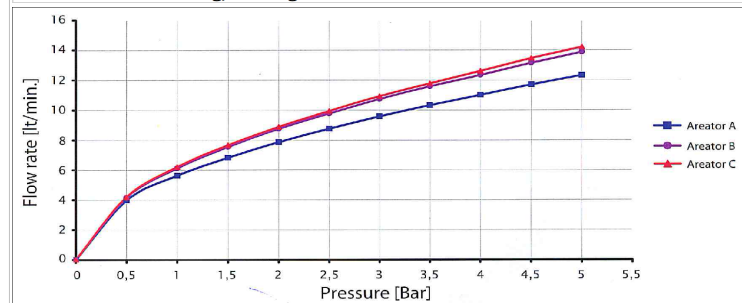

TEST ESEGUITO CON RUBINETTO DI RIFERIMENTO PER LABORATORIO - TEST PERFORMED WITH LABORATORY REFERENCE TAP