

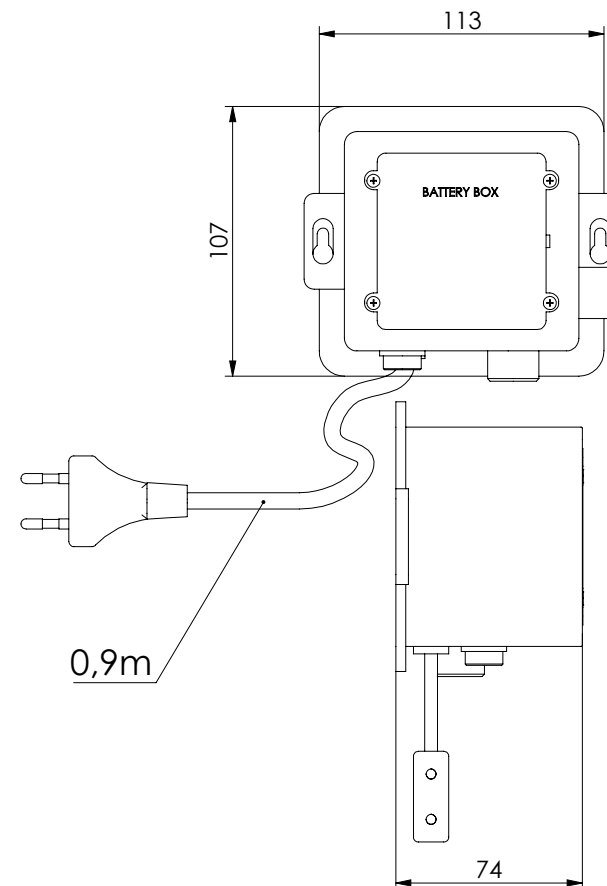
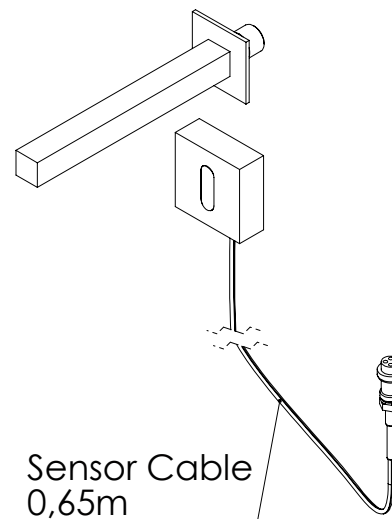



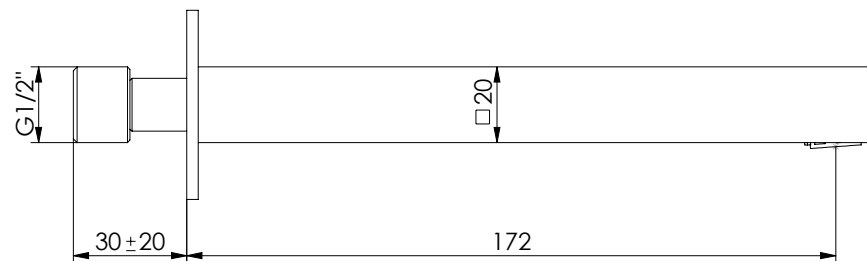

ESC. 1:2	Torneira Lavatório Embutir Célula Quadrada					
Desenhou 29/05/2020						
Rev: 2	SN011					
12/04/2022						


Service:

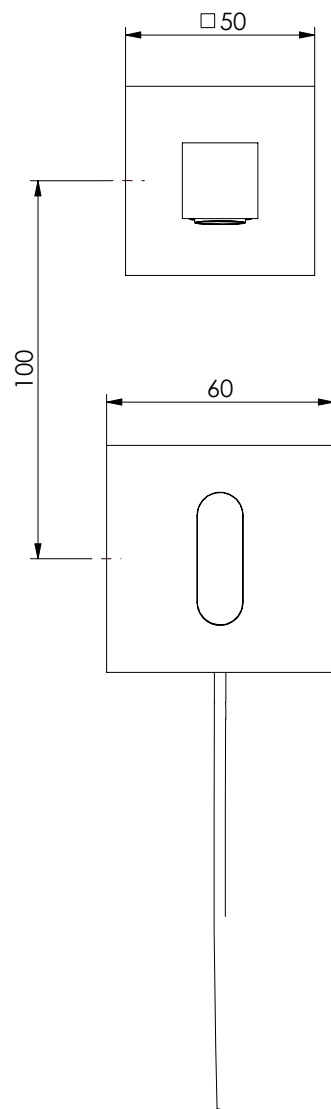

MAX
80 C°




-65 C°
-15 C°



30^s



18/19 - 22/23



Screw Driver




2mm


Washbasin Mixer Installation Manual

2°

Fixed:

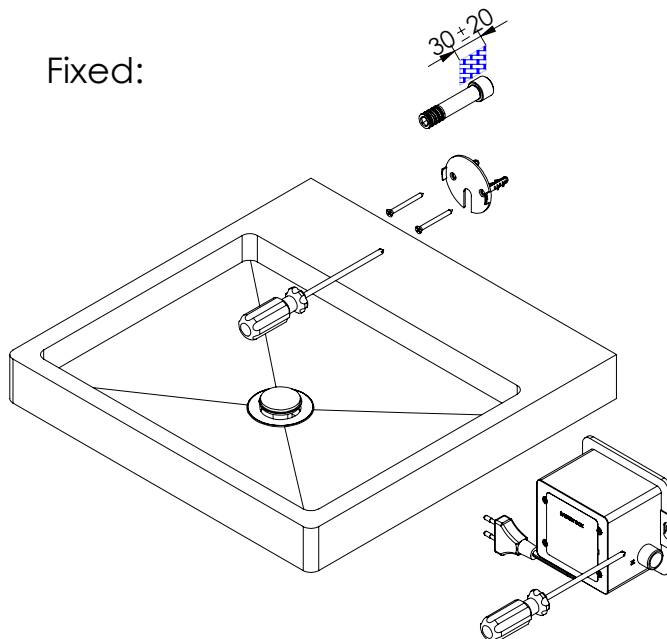


3°

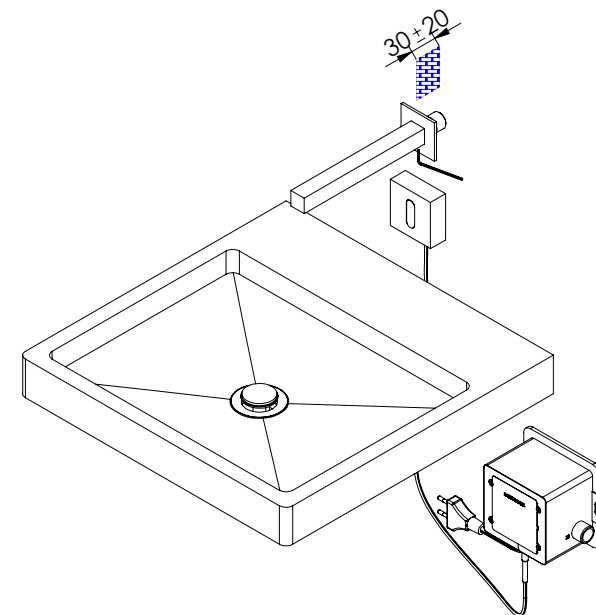


4°

Conection:

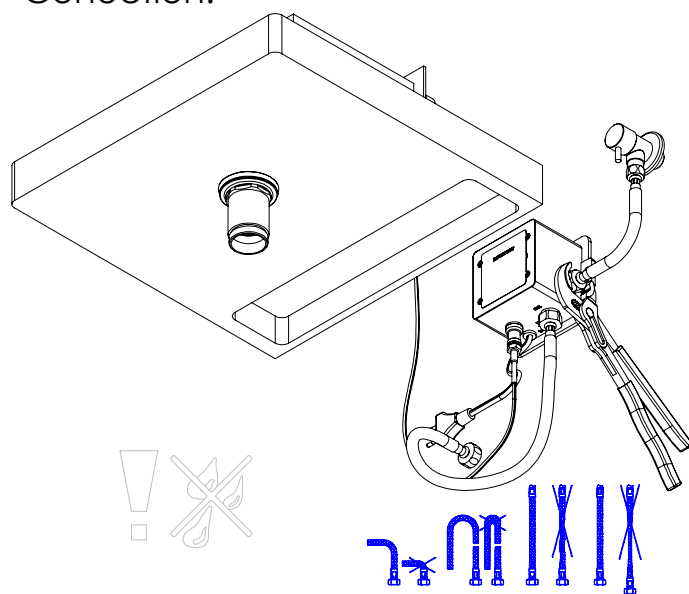

5°

Maintenance:

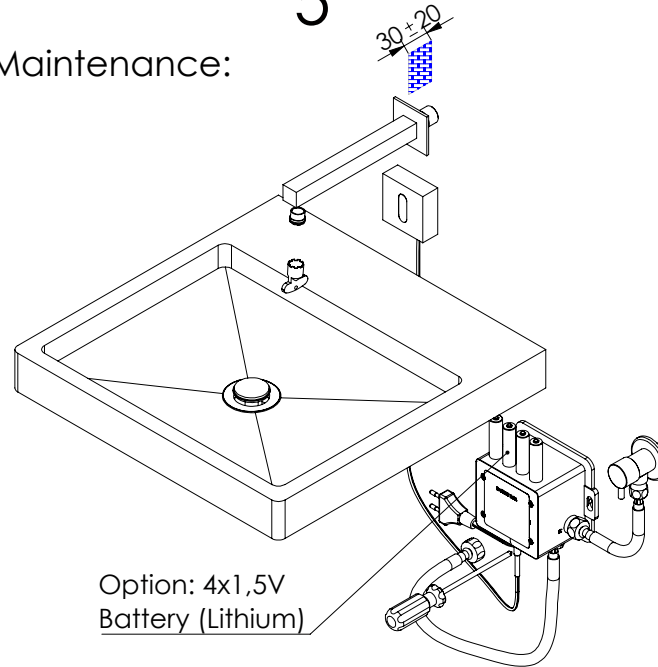

Technical specifications

Voltage supply	DC6V
Working pressure	1 - 7 bar
Pressure resistance closed (1 min)	35 bar
Life test	500.000 cycles
Max. Hot water	75°C
Flow rate (RhA)	10.8 l/min
Sensor activation time	<1 s
Protection against intrusion (control box)	IP 65
Protection against intrusion (sensor)	IP 67
Sensor detection distance	≤ 35 cm
Power consumption (standby)	< 0,2mW
Power consumption (flushing)	< 3W
Water Saving Function	Auto off adjustable up to 1 min
Thread	G 1/2 - 14
Battery type (included)	4 X AA 1.5V
Sensor detection angle	15 deg (conical)